



Collettori di distribuzione in Polimero

MANDATA

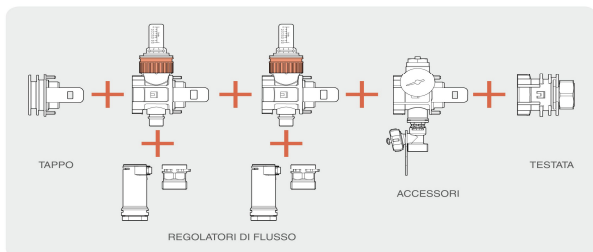

RITORNO

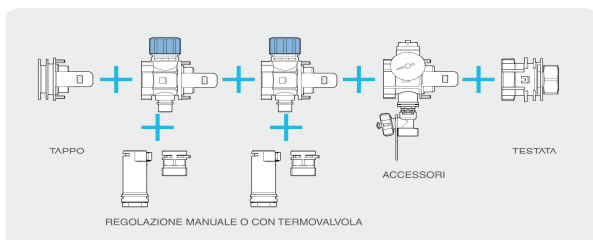

P/N	
YSRT4-M-F11/4	(flat gasket connection)
YSRT4-M-F11/4-OR	(o'ring connection ball valve application)
YSRT4-M-F1	(flat gasket connection)
YSRT4-M-F1-OR	(o'ring connection ball valve application)
YSRT3-M-F11/4	(manual air bleed)
YSRT3-M-F11/4-A	(automatic air bleed)
YSRTYSRGMD-M	(profile for quick coupling)
YSRTYSRGMD-M-C	
YSRTYSRGMDEU02/PB	
YSRTYSRGMDEU02/PB	
YSRTYSRGMDEU02/PB	
YSRTYSRGMDEU02/PB	
YSRTYSRGMDEU02/PB	(profile for quick coupling)
YSRTYSRGMDEU03/PB	
YSRTYSRGMDEU03/PB	(profile for quick coupling)
YSRTEV-M	(profile for quick coupling)
YSRTEV-M-C	
YSRTEV-EU-02/PB	
YSRTEV-PU-02/PB	(profile for quick coupling)
YSRTEV-EU-03/PB	
YSRTEV-PU-03/PB	(profile for quick coupling)
YSRTF1/2-M-T	
YSGTE1-ST-TL	(single bracket 8cm cabinet)
YSGTE1-ST-TL-A	(single bracket 12cm cabinet)
YSGTE1-ST-TL3X2	(couple of brackets 8cm cabinet)
YSGTE1-ST-TL3AX2	(couple of brackets 12cm cabinet)
YSRVSF-M-MF11/4	(flat gasket connector to the manifold)
YSRVSF-M-MF11/4OR	(o'ring connection to the manifold/valve)
YSRVSF-R-MF11/4	(flat gasket connector to the manifold)
YSRVSF-R-MF11/4OR	(o'ring connection to the manifold/valve)
YNSGUS0131/8P	(insulation until 8 ports)
YNSGUS0131/8PX2	(insulation from 9 to 16 ports)
YSRPFM-C	(fixed point valve)
YSRPFM-C1	(balancing valve)
YSRGGM-C	
YSRGGM-C-D	
YSRGGM-C-B	
YSRGGM-C-M3/4-A	
YSRGGM-C-M3/4-C	
YSRGGM-C-M3/4-B	
YSRGGM-C-M3/4	
YSRGGM-C-M3/4-E	
YSRGGM-C-TAPP	
YSRTYSRGBY-M-A	(by-pass valve)

PRESTAZIONI

Fluidi ammessi	acqua, soluzioni glicolate
% glicole max	50%
Temperatura di normale esercizio	5÷55 °C
Temperatura max	90 °C a 3 bar
Pressione di normale esercizio	0÷6 bar
Pressione max	10 bar
Pressione di scoppio	> 22 bar a temperatura ambiente > 15 bar a 50 °C